


T30

SERIES

DIGITAL PID CONTROLLER

Built in powerful performance

TIMER

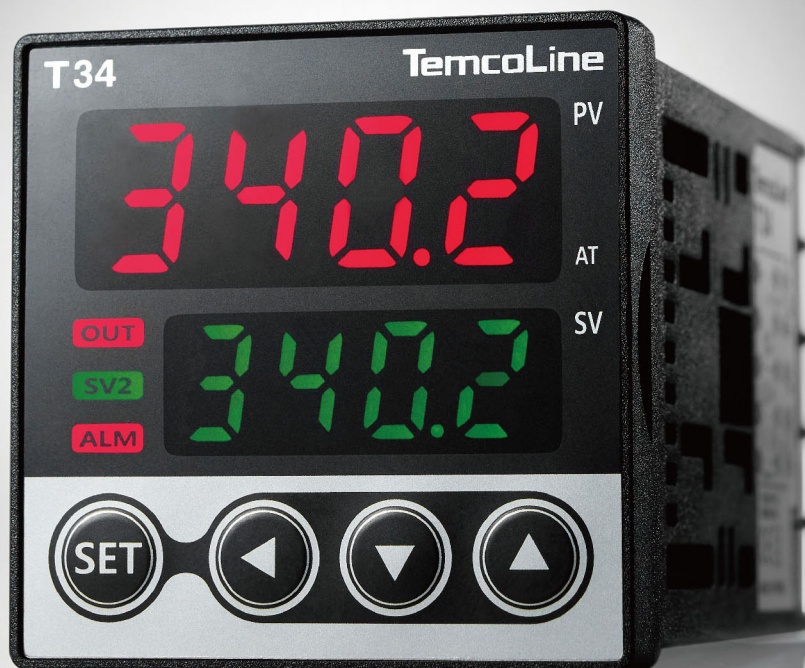

Hybrid
PID controller + Timer



TemcoLine™

Misung Bldg, 217-1, Gurojungang-ro, Guro-gu, Seoul, 08216 Korea
Tel: +82-2-3667-5521 Fax: +82-2-2632-5549 www.temcoline.com
E-Mail: sales@temcoline.com

T30 SERIES



Alarm 2 of the T30 series supports to powerful digital timer function.

■ Timer output mode (ALARM 2)

Normal : ON-Delay

- T1 : ON-Time, Auto Run (one shot)
 - T2 : ON-Time, Manual Run (one shot)
 - T3 : ON-Time, Manual Run (one shot) : without temperature
 - T4 : Flicker (ON-Time setting from front display)
 - T5 : Flicker (OFF-Time setting from front display)
- Except the time set from the front, it is set in the internal menu.



■ Time unit of 2 types (min/hours)

■ External Digital input (D.I) - Run/Stop

Alarm 3 of the T30 series supports a start/stop control of inverter operation function.

T30 series supports operation start/ stop function during inverter control (4~20mA) to enable more stable control and solve the problems of life time and power saving of peripheral devices.



T50

SERIES

DIGITAL PID CONTROLLER

HEATING & COOLING

in the same time control

Heating & Cooling
selectable for All models



TemcoLine™

Misung Bldg, 217-1, Gurojungang-ro, Guro-gu, Seoul, 08216 Korea
Tel: +82-2-3667-5521 Fax: +82-2-2632-5549 www.temcoline.com
E-Mail: sales@temcoline.com

T50 SERIES




T50 series supports heating & cooling in the same time control.


- Perfect universal product (multi): consumer use optionally after purchase
- Input sensor- 24 types
- Output type- 4 types (Relay 2 types, SSR, SCR)
- Control type- 3 types (Heating, Cooling, Simultaneous heating and cooling control)

T50 series supports the selection of event output (3 basic alarms) function.

- Freely configurable output port
- Merit of the selection of event output:
 1. simple wiring process
 2. material reduction
 3. simple of port management

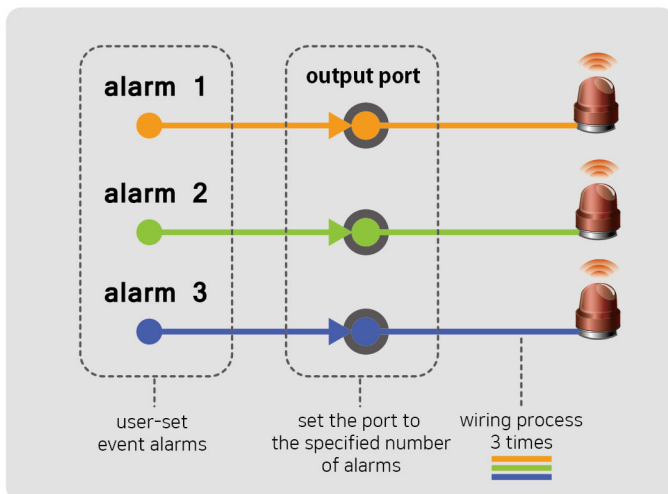


- example of an event output to other company products -

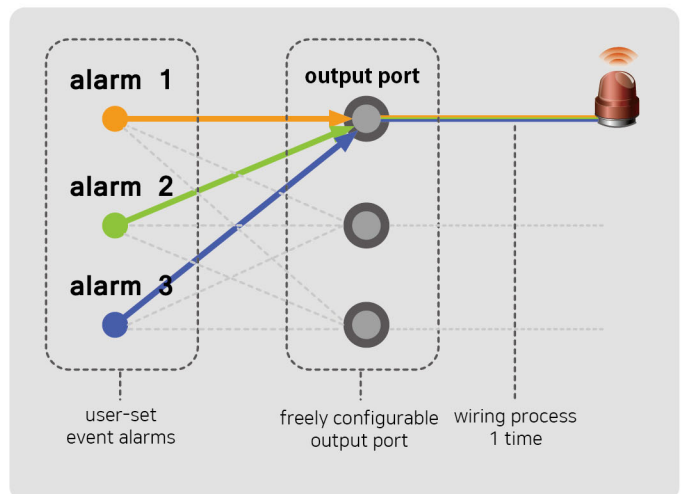

- example of an event output to TemcoLine products -

T50 series is inside AC ammeter in products.

- Tolerance offset
- hold ON/OFF
- Current external display (SV)
- Can be display current of TPR

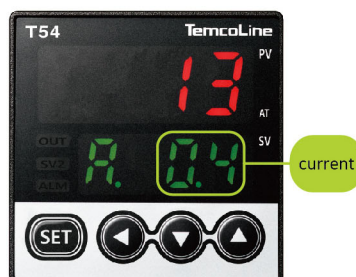

T50 series is displayed Heater life time.

- Heater Break Alarm (HBA)
- Heater life time: cumulative display during max. 30 years (prediction of heater's life)

